

Features

- Low insertion loss
- High channel isolation
- Low polarization dependent loss
- Exceptional reliability and stability



Applications

- Access networks
- Metro WDM Systems
- Enterprise networks

Product Description

Primanex DWDM multi-channel multiplexer /demultiplexer (Mux /DeMux) modules are available on ITU channel spacing of 200GHz. They demonstrate low loss, temperature insensitivity and reliable performance in any system application.

Fixed Mux/DeMux modules offer low-cost wavelength management solutions that are suitable for long haul, metro, and access application.


Specifications

Item	Unit	Parameters				Notes
Channel Spacing	GHz	100		200		
Wavelength Range		C- or L-band ITU channels 186.6 to 196.1 THz				
Channel Centers	nm	ITU				
Channels	ch	4	8	4	8	
Passband	GHz	≥ +/- 12.5		≥ +/- 33		
Passband Ripple	dB	≤ 0.5				
Channel Insertion Loss	dB	2.0	3.0	2.0	3.0	
Optional express Insertion Loss	dB	1.8	2.8	1.8	2.8	
Isolation (adjacent channel)	dB	≥ 30				
Isolation (non-adjacent channel)	dB	≥ 50				
Polarization Dependent Loss	dB	≤ 0.2				
Polarization Mode Dispersion	ps	≤ 0.2				
Directivity	dB	≥ 50				
Return Loss	dB	≥ 45				
Optical Power Handling	mW	≤ 500				
Operating Temperature Range	°C	-5 to 70				
Storage Temperature Range	°C	-40 to +85				
Fiber Type	NA	SMF-28e+				
Package dimensions (L x W x H)	mm	100 x 80 x 10			ABS	


*. All the specifications are based on the devices without connectors, and guaranteed over wavelength, polarization and temperature.

** Specifications are subject to change without notice.

Dimensions Drawing (Unit: mm)

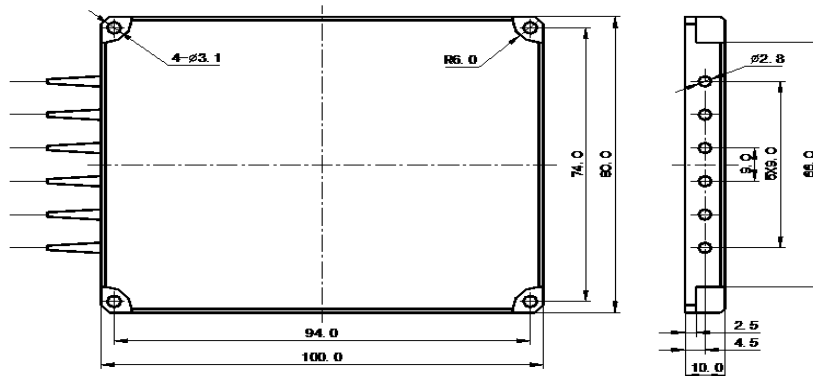

Spectral Plot (Unit: dB)

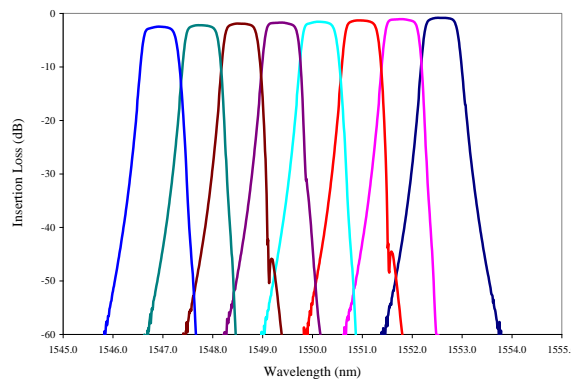

Ordering Information (Example: DWMM-2F2DS02620)

DWMM-	<input type="checkbox"/>	F	<input type="checkbox"/>	<input type="checkbox"/>	S	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Channel Spacing		Code Type				Channel Frequency Code			Fiber Length	Connector Type
1. 100 GHz		D. Demux				Provided by Primanex upon customer confirmation			1. 0.5+/-0.1 m	0. No Connector
2. 200 GHz		M. Mux							2. 1.0+/-0.1 m	1. FC/UPC
									3. Others	2. FC/APC
Number of Channels										3. SC/UPC
1. 4 Channel										4. SC/APC
2. 8 Channel										5. Others
3. Others										

All statements, technical information and recommendations related to the products herein are based upon information believed to be reliable or accurate. However, the accuracy or completeness thereof is not guaranteed, and no responsibility is assumed for any inaccuracies. The user assumes all risks and liability whatsoever in connection with the use of a product or its application. Primanex reserves the right to change at any time without notice the design, specifications, function, fit or form of its products described herein, including withdrawal at any time of a product offered for sale herein. Primanex makes no representations that the products herein are free from any intellectual property claims of others. Please contact Primanex for more information. Primanex and the Primanex logo are trademarks of Primanex Corporation. Other trademarks are the property of their respective holders.