


## Feature

- Low Insertion Loss
- High Return Loss
- Wide Operating Wavelength, Working Distance & Temperature Range
- Compact Footprint
- Exceptional Reliability and Stability

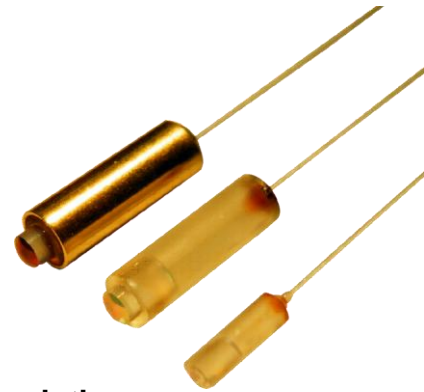

## Applications

- Fiber Optics Components and Modules
- Free-space Optics Integration
- Test & Measurement

## Product Description

Primanex collimator can provide a low cost solution with excellent performances including low insertion loss, high return loss. In addition, Primanex can design various parameters by customer's requirement such as beam spot diameter, working distance, dimension etc.


## Specifications

Item	Unit	Parameters	Note
Working Wavelength	nm	1310/1550	Other wavelength optional
Operating Band Width	nm	1260~1620	Wider operating band width available upon request
Lens Type	N/A	C-lens / G-lens	
Fiber Type	N/A	SMF-28e+	Other fiber is optional
Working Distance	mm	5.5 +/- 0.5 (Standard)	Customizable
Insertion Loss	dB	0.40 (Typ.); 0.50 (Max.)	For a pair of collimators spaced at working distance
Return Loss	dB	≥50	
Beam Spot Diameter	mm	0.35 (Typ.); 0.50 (Max.)	2 $\omega$ diameter (at $1/e^2$ intensity) measured at beam waist; Customizable
Maximum Optical Power	W	5W for CW, and /or 100 $\mu$ J for nano-second pulsed laser	Higher power handling available upon request
Operating Temperature	$^{\circ}$ C	-5 ~ 70	
Storage Temperature	$^{\circ}$ C	-40 ~ 85	
Dimension ( $\phi$ -D x A)	mm	$\phi$ 3.20 x 9 (with metal tube) $\phi$ 2.78 x 9 (with glass tube) $\phi$ 1.65 x 6 (with glass tube) $\phi$ 1.38 x 8 (with glass tube)	Customizable
Lens Chip (size B)	mm	0~1	Customizable
Pigtail Chip (size C)	mm	0~1	Customizable

\*. All the specifications are based on the devices without connectors, and guaranteed over wavelength, polarization and temperature.

\*\* Specifications are subject to change without notice.

## Dimensions and Beam Illustration

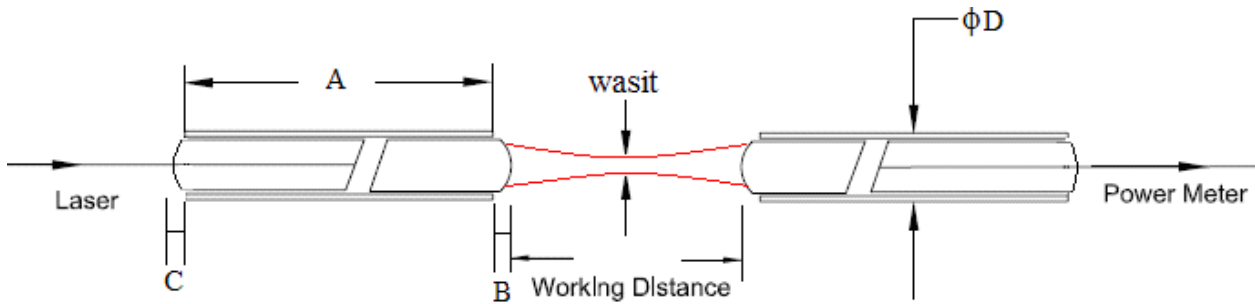

## Ordering Information (Example: PFCC2-23C11120)

<b>PFCC</b> <input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>Max Laser Power</b>				<b>Lens Type</b>		<b>Fiber Type</b>		<b>Fiber Length</b>	
1. Regular 500 mW				C. C-lens		1. G.652.D		1. 1.5 +/- 0.1 m	
2. 100μJ for pulsed laser				G. G-lens		2. G.657.A1		2. 1.8 +/- 0.1 m	
Or 5W for CW laser						3. G.657.A2		3. 3.3 +/- 0.1 m	
3. Others						4. Others		4. Others	
<b>Central Wavelength</b>				<b>Working Distance</b>		<b>Fiber Tuber</b>		<b>Connector Type</b>	
1. 1310 nm				1. Standard		1. 250μm fiber		0. No Connector	
2. 1550 nm				2. Others		2. 900μm fiber		1. FC/UPC	
3. Others						3. Others		2. FC/APC	
<b>Dimension</b>								3. SC/UPC	
1. Φ 3.20 x 9 mm								4. SC/APC	
2. Φ 2.78 x 9 mm								5. LC/PC	
3. Φ 1.65 x 6 mm								6. MU/PC	
4. Φ 1.38 x 8 mm								7. Others	
5. Others									

All statements, technical information and recommendations related to the products herein are based upon information believed to be reliable or accurate. However, the accuracy or completeness thereof is not guaranteed, and no responsibility is assumed for any inaccuracies. The user assumes all risks and liability whatsoever in connection with the use of a product or its application. Primanex reserves the right to change at any time without notices the design, specifications, function, fit or form of its products described herein, including withdrawal at any time of a product offered for sale herein. Primanex makes no representations that the products herein are free from any intellectual property claims of others. Please contact Primanex for more information. Primanex and the Primanex logo are trademarks of Primanex Corporation. Other trademarks are the property of their respective holders.